

## LCIS ANALOGUE/FREQUENCY CONVERTERS, ADJUSTABLE

750511.0000

LCIS-WAF Converter, dc signals, freq output, 24V ac/dc, screw

- 6,2mm wide
- Input and output selectable
- 3-way isolation, 2,5kV
- 24V AC/DC supply voltage
- Screw or Push-in termination

### PRODUCT DESCRIPTION


Signal converter for converting common standard signals into corresponding frequency. DIP switch for selecting the input and output signal, output signal range can be selected between 4 different options. Output voltage is 10V. The converter is self-calibrating which ensures easy installation.

The converter features 3-way galvanic isolation, each terminal can be connected by jumper comb. Extremely compact design, width of 6,2mm only. Can be installed in any position.

### TECHNICAL DATA

|                                   |   |
|-----------------------------------|---|
| <b>Accuracy</b>                   | 0.1 % FSR   |
| <b>Approvals</b>                  | CE, CSA, DNV, GL, RoHS, UL                                      |
| <b>Connection type</b>            | Screw   |
| <b>Cross section max</b>          | 2,5 mm <sup>2</sup>   |
| <b>Cross section min</b>          | 0,25 mm <sup>2</sup>  |
| <b>Depth</b>                      | 73 mm   |
| <b>Galvanic isolation</b>         | 3-way   |
| <b>Height</b>                     | 93 mm   |
| <b>Input</b>                      | 0-10 V, 0-20 mA, 4-20 mA  |
| <b>Input impedance current mA</b> | 100 Ω   |
| <b>Input impedance voltage</b>    | 330 kΩ  |
| <b>Input/Output protection</b>    | Overvoltage, current input PTC fuse, short circuit-proof output |

|                                    |                      |
|------------------------------------|----------------------|
| <b>Insulation</b>                  | 2.5 kV               |
| <b>Insulation voltage in/out</b>   | 2500 V               |
| <b>IP class</b>                    | IP20                 |
| <b>Linearity</b>                   | 0,05 % FSR           |
| <b>Manual switch</b>               | Yes                  |
| <b>Mounting</b>                    | DIN-Rail             |
| <b>Output</b>                      | 0-10 kHz             |
| <b>Status indication</b>           | Green LED            |
| <b>Storage temperature max</b>     | 80 °C                |
| <b>Storage temperature min</b>     | -40 °C               |
| <b>Supply voltage</b>              | 24 V AC/DC           |
| <b>Switching frequency max</b>     | 30 Hz @ 3 dB         |
| <b>Temperature coefficient</b>     | <150 ppm/° K FSR     |
| <b>Temperature operational max</b> | 60 °C                |
| <b>Temperature operational min</b> | -25 °C               |
| <b>Type of converter</b>           | Analogue - frequency |
| <b>Weight</b>                      | 29 g                 |
| <b>Width</b>                       | 6,2 mm               |

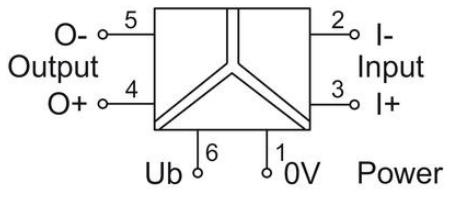

| <b>S1</b> |           | <b>Input</b> |
|-----------|-----------|--------------|
| ●→        | Switch On | 1 2 3 4      |
| 0-10 V*   |           | ●            |
| 0-20 mA   |           | ●            |
| 4-20 mA   |           | ● ●          |

| <b>S1</b>  |           | <b>Output</b> |
|------------|-----------|---------------|
| ●→         | Switch On | 5 6           |
| 0-50 Hz*   |           |               |
| 0-100 Hz   |           | ●             |
| 0-1000 Hz  |           | ● ●           |
| 0-10000 Hz |           | ● ●           |

