

MOLEX - MPM M8/M12-DIN A / DIN B INDUSTRIAL MOULDED CABLE CONNECTORS

E850B0P12M010R

Cordset-M12 str. male LED+VDR 1m PUR

- Fully overmoulded for better protection
- Quick and simple installation with M8 and M12
- With or without LED and transient protection
- EN175301-803 (DIN43650)-M8 / M12




PRODUCT DESCRIPTION

DIN Valve Connectors with moulded cable, IP65 rated. IP67 version available on request.

TECHNICAL DATA

Cable length	1 m
Circuit	C4: LED & varistor
Colour cable	Black
Colour LED	Yellow
Connection - male	M12
Connector	DINA 43650
Contact head 1	DIN
Current max	3 A
IP class	IP65
LED indicator	Yes
Material cable	PUR/PVC
Rated wire cross section	0,5 mm ²
Temperature range fixed use from	-40 °C
Temperature range fixed use to	90 °C
Temperature range flexible use from	-15 °C
Temperature range flexible use to	90 °C
Voltage ac/dc max	24 V

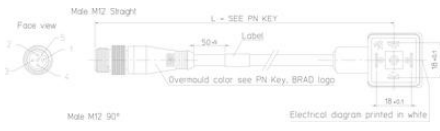

M12

DIN C4

