


CROSS CONNECTORS FOR RK, IK, DLI & SK RANGE

Q, QI

2567.0

Q 2 - 2 pole cross connector for RK/RKD 2.5

- Screw in
- Insulated versions
- Can be cut down

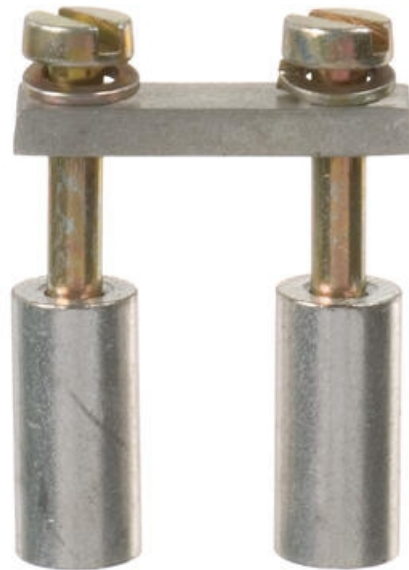

PRODUCT DESCRIPTION

The Q/QI screwable cross-connector system allows you to quickly link terminal blocks of the same size.

The QI range is touch-safe and are generally available in 2, 3, 4 or 10 poles, some variants have up to 98 poles, which can be cut down as required.

With both ranges it is possible to 'skip' over terminals by breaking out the conductor (QI) or removing the screw and sleeve (Q).

TECHNICAL DATA

GENERAL DATA

Rated wire cross section	2,5 mm ²
Mounting	Screw in
Contamination degree	3
Max voltage with partition	800 V
Rated current IEC	20 A
Max voltage without partition	400 V
Additional information	for RK 2,5 KBL 2,5 RKD 2,5 KBLD 2,5

DIMENSIONS

Length	4 mm
Width	9,1 mm
Pitch	5 mm

Distance to hole centres	5,1 mm
Hole diameter	2,8 mm

CONNECTION DATA

Torque max	0,8 Nm
Torque min	0,4 Nm
Screw size	M 2,5
Number of poles	2
Screw type	Slotted

MATERIALS

Material	Copper
-----------------	--------

ADDITIONAL DATA

Pack size	50
Country of origin	DE
Tariff code	85369010
Weight	2,2 g