


DIRECT MOUNT SCREW TERMINALS

BKA, RD-D

1320.2

BKA 2.5/1 Beige, 2.5mm² Direct mountable compact

- Compact 2.5mm -10mm² versions snap together
- Pre-labeled versions
- RK-D 50mm -240mm² Direct mount
- External cross connectors

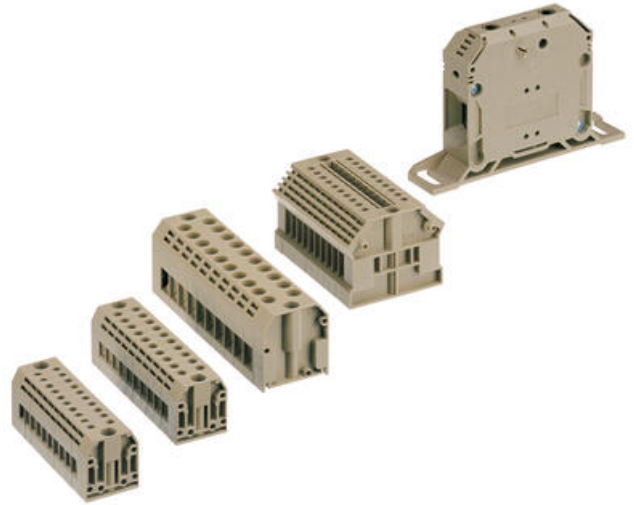

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Rated impulse voltage	6 kV
Colour	Beige
Rated wire cross section	2,5 mm ²
Rated voltage IEC	400 V
Mounting	Direct mount
Contamination degree	3
Rated current IEC	24 A
Approvals	UL, cUL, KEMA KUR, EAC
Overvoltage category	III

DIMENSIONS

Length	22 mm
Width	5 mm
Height	23 mm

CONNECTION DATA

Cross section stranded wire to	4 mm ²
Cross section single wire from	0,2 mm ²

Torque max	0,8 Nm
Connections	2
Cross section stranded wire from	0,2 mm ²
Torque min	0,4 Nm
Rated wire cross section to (AWG)	12
Rated wire cross section from (AWG)	22
Cross section stranded with ferrule from	0,2 mm ²
Screw size	M 2,5
Screw type	Slotted
Cross section stranded with ferrule to	2,5 mm ²
Stripping length	7 mm
Cross section single wire to	4 mm ²
Number of levels	1
Plug gauge acc. EN 60 947-1	A3

MATERIALS

Flammability class	UL94-V2
Operating temperature from	-40 °C
Operating temperature to	105 °C
Insulation material	Polyamide 6.6

APPROVALS

UL test standard	UL 1059
Rated current UL	20 A
Rated current cUL	20 A
Rated voltage UL	300 V
KEMA KEUR test standard	EN 60947-7-1:2009
Rated voltage cUL	300 V
cUL test standard	C22.2 No 158
EAC test standard	TR ZU 004/2011

ADDITIONAL DATA

Pack size	100
Country of origin	DE
Tariff code	85369010
Weight	3,4 g

