




ASCO - 356 SERIES DIRECT OPERATED

3/2 Valve Block

SCG356A819V

2 valve manifold, N/C, 3/2, 1/8", 230VAC

- Normally closed/open or universal
- Save space and installation time
- Working pressure 0 bar to 10 bar
- Block in brass or stainless

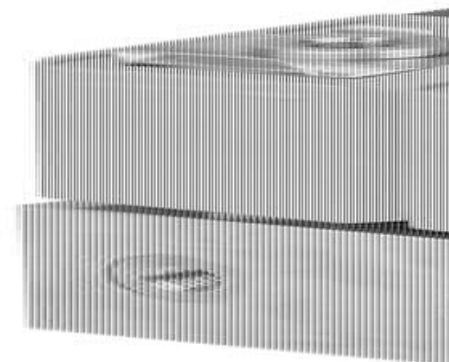

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Function	3/2, Normally Closed
Flow factor / flow coefficient	0,08
IP class	IP65

MATERIAL DATA

Material body	Brass
Material of seals	FPM
Material seat	Brass

TEMPERATURE DATA

Temperature of media from	-10 °C
Temperature of media to	100 °C

ADDITIONAL DATA

Close delay	5 ms
Viscosity max	40 cSt
Approvals	CSA, UL

Weight	0,321 kg
Differential oil pressure max	10 bar
Connection port 3	M5
Response time off	10 ms
Differential air pressure max	10 bar
Material short-circuit ring	Copper
Differential water pressure max	10 bar
Differential pressure min	0 bar
Temperature operational max	60 °C
Material spring	Stainless steel
Material plunger	Stainless steel
Material plunger tube	Stainless steel
Power consumption	4 W
Material seat seal	FPM
Voltage ac max	230 V
Flow max	1,33 l/min
Temperature operational min	-10 °C
Number of valves	2
Throughput	1,6 mm
Connection port 1-2	G1/8

