

DATALOGIC - SAFE PHOTO CAMERA S5 / SL5

S5-5-G8-62SGST4
 Safety photocell, transmitter, 0-8m




- Range up to 40 m
- Type 4, SIL3, PL e
- Working temperature down to -25 °C

PRODUCT DESCRIPTION

TECHNICAL DATA

| | |
|-----------------------------|------------------------|
| Approvals | CE, cULus, TÜV |
| In compliance with | EMC, LVD, MD |
| IP class | IP67 |
| Material of body | ABS plastic, Aluminium |
| Output | PNP |
| Range | 0-8 m |
| Reaction time | 1 ms |
| Sensing distance | 8 m |
| Storage temperature max | 70 °C |
| Storage temperature min | -25 °C |
| Supply voltage | 24 V DC |
| Temperature operational max | 55 °C |
| Temperature operational min | -25 °C |
| Type of light | IR LED |
| Voltage tolerance | ±15 % |

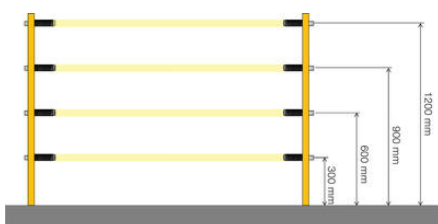

S5-5-G8-62-SG-ST4

