


# MINIMOTOR PCEDBS BRUSHLESS SERVOMOTOR WITH PLANETARY GEARBOX

PCEDBS 55/50-33-B3  
24/48 Vdc, 90.1rpm, 8.7nm, B3 mount

- Efficient and compact
- Saves individual cable runs
- up to 77nm rated torque
- Open bus protocol
- Reduce machine build components

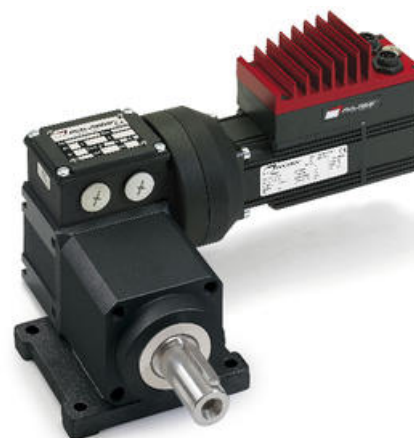

## PRODUCT DESCRIPTION

## TECHNICAL DATA

### GENERAL DATA

Nominal speed	90,1 rpm
Nominal torque	8,7 Nm
Input voltage dc	24/48 Vdc
Digital inputs	2 pnp (24Vdc, 500kHz) , 3 pnp (24Vdc, 7kHz)
Outputs	1 NO 2A (42 Vdc)
Output power	125 W
Rated current	8A@24V/4.2A@48V A
Nominal overload	200% x 60 sec
Motor control algorithm	Sinusoidal brushless with 12Bit single-turn / 20Bit multi-turn absolute encoder
Nominal output frequency carrier	4/8/12 kHz
Electronic brake output	24Vdc, max 0.5A
Ambient temperature	-10 ... +40°C

### SAFETY FEATURES

IP class	IP65
CE approved	Yes
Over voltage protection	Yes
Under voltage protection	Yes

<b>Overheat protection</b>	Yes
<b>Memory error protection</b>	Yes
<b>Polarity reverse protection</b>	Yes
<b>Overcurrent protection</b>	Yes
<b>Communication error protection</b>	Yes
<b>Overload protection</b>	Yes

## COMMUNICATION

<b>Communication</b>	USB
<b>Ethercat</b>	Yes
<b>CanOpen</b>	Yes
<b>ProfiNET</b>	Yes
<b>Ethernet IP</b>	Yes
<b>Modbus RTU</b>	Yes
<b>PowerLink</b>	Yes
<b>Ratio</b>	33.25:1