


## KUEBLER - INCREMENTAL PULSE TRANSDUCER, STAINLESS STEEL, SENDIX 5006/5026

SERIE 5006

- Housing diameter Ø58 mm
- stainless steel housing
- Axle seal in Viton® from DuPont ©
- Temperature range -40 to +85 ° C

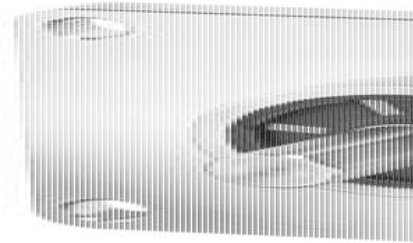

### PRODUCT DESCRIPTION

Sendix 5006/5026 is a robust incremental shaft sensor specially designed for industrial use outdoors or in the food industry. The shaft seal is in Viton® material from DuPont. Viton® is specially designed to cope with chemical impact. With its powerful housing, the sensor is more protected from impact and impact than previous models in the 58XX series. With the new Safety-Lock™ construction, the bearings in the angle sensor have been placed with a larger line spacing and a special locking latch that prevents stock displacement in any direction.

The sensor comes with shaft and hole shaft, in combination with several different flanges to fit where 58mm sensors have previously been sitting.

Please refer to the images below for ordering information.



<b>Order code</b> <b>Shaft version</b>	<b>8.5006</b> Type	<b>. XXXX4 .</b> a b c d	<b>XXXX</b> e		
<b>a Flange</b> 7 = clamping flange ø 58 mm [2.28"] A = synchro flange ø 58 mm [2.28"] C = square flange □ 63.5 mm [2.5"]	<b>b Shaft (ø x L), with flat</b> 1 = ø 6 x 10 mm [0.24 x 0.39"] 3 = ø 10 x 20 mm [0.39 x 0.79"] 8 = ø 3/8" x 7/8"	<b>c Output circuit / power supply</b> 2 = push-pull (7272 compatible with inverted signal) / 5 ... 30 V DC 5 = push-pull (with inverted signal) / 10 ... 30 V DC 4 = RS422 (with inverted signal) / 5 V DC	<b>d Type of connection</b> 4 = radial M12 connector, 8-pin	<b>e Pulse rate</b> 1, 5, 10, 12, 36, 100, 200, 250, 256, 360, 400, 500, 512, 600, 800, 1000, 1024, 1200, 2000, 2048, 2500, 3600, 4096, 5000 (e.g. 100 pulses => 0100)	<b>Optional on request</b> - other pulse rates - Ex 2/22 - seawater resistant (stainless steel V4A)
				<b>Stainless steel V4A as standard types (deliverable as from 1 unit)</b> <b>V4A</b> 8.5006.73XX4.XXXX-V4A 1.4404	

<b>Order code</b> <b>Hollow shaft</b>	<b>8.5026</b> Type	<b>. XXXX2 .</b> a b c d	<b>XXXX</b> e		
<b>a Flange</b> 1 = with spring element, long C = with stator coupling, ø 63 mm	<b>b Through hollow shaft</b> 2 = ø 1/4" 4 = ø 3/8" 3 = ø 10 mm [0.39"] 5 = ø 12 mm [0.47"] 6 = ø 1/2" 8 = ø 15 mm [0.59"]	<b>c Output circuit / power supply</b> 2 = push-pull (7272 compatible, with inverted signal) / 5 ... 30 V DC 5 = push-pull (with inverted signal) / 10 ... 30 V DC 4 = RS422 (with inverted signal) / 5 V DC	<b>d Type of connection</b> 2 = radial M12 connector, 8-pin	<b>e Pulse rate</b> 1, 5, 10, 12, 36, 100, 200, 250, 256, 360, 400, 500, 512, 600, 800, 1000, 1024, 1200, 2000, 2048, 2500, 3600, 4096, 5000 (e.g. 100 pulses => 0100)	<b>Optional on request</b> - other pulse rates - Ex 2/22 - seawater resistant (stainless steel V4A)
				<b>Stainless steel V4A as standard types (deliverable as from 1 unit)</b> <b>V4A</b> 8.5026.18X2.XXXX-V4A 1.4404	



### TECHNICAL DATA

<b>Connection</b>	M12
-------------------	-----



<b>Housing diameter</b>	58 mm
<b>IP class</b>	IP66, IP67
<b>Mounting</b>	Shoulder
<b>Output</b>	Push/Pull, RS422
<b>Pulse max</b>	5000
<b>Sensor type</b>	Incremental
<b>Shaft diameter max</b>	10 mm
<b>Shaft diameter min</b>	6 mm
<b>Supply voltage dc max</b>	30 V DC
<b>Supply voltage dc min</b>	5 V DC
<b>Temperature operational max</b>	85 °C
<b>Temperature operational min</b>	-40 °C
<b>Version</b>	Multiturn



1 M3, 5.5 djup



1 3xM4, 6 djup



Terminal assignment

Output channel	Type of connector	M12 connector, 6 pin
2, 4, 5	5006-4	Signal
	5006-2	Pin

AV Encoder power supply +V DC  
 eV Encoder power supply ground (GND) 0 V  
 A, X Incremental output channel A  
 B, B Incremental output channel B  
 S Reference signal  
 PH Plug connector housing (SH48)

Top view of mating side, male contact base



M12 connector, 6 pin

Terminal assignment

Output channel	Type of connector	M12 connector, 8 pin
2, 4, 5	5006-4	Signal
	5006-2	Pin

AV Encoder power supply +V DC  
 eV Encoder power supply ground (GND) 0 V  
 A, X Incremental output channel A  
 B, B Incremental output channel B  
 S Reference signal  
 PH Plug connector housing (SH48)

Top view of mating side, male contact base



M12 connector, 8 pin