



PANEL MOUNT ETM2432 TIMER

35 x 77 mm format

ETM2432-230
Digital Timer, 4 Digit, 100h, 230V ac

- External start, reset and hold digital inputs
- Dual contact timed output
- Nine timing modes
- Easy integration





PRODUCT DESCRIPTION


This is a digital timer with delay and pulse functions that can be set for hours, minutes and seconds. Start and stop is managed using buttons on the front or with separate control inputs. The timer has one relay output and adjustable warning tones. The functions are programmed with buttons in an easy-to-understand menu system, the program can be locked preventing access.

TECHNICAL DATA

Approvals	CE, EMC, RoHS
Depth	60 mm
Digit height	12,5 mm
Digital signal in	Yes
Display	0.01 - 99.59 minutes or hours
Display colour	Red
Frequency	50-60
Galvanic isolation	Between supply voltage and input/output
Indication	Red LED
Input	Mechanical contact (min 50ms, 12V)
IP class	IP65
Memory	10 years (EEPROM)
Mounting	Panel mount
Number of digits	4
Operating voltage ac max	253 V
Operating voltage ac min	207 V

Output	Relay 2 pole C/O
Panel size	35x77 mm
Power consumption	Max 7 VA
Relay function	1 x NO; 1 x NC
Relay output	8A, 250Vac, resistive load
Storage temperature max	70 °C
Storage temperature min	-25 °C
Supply voltage	230 VAC
Temperature resistance housing to	50 °C
Weight	200 g

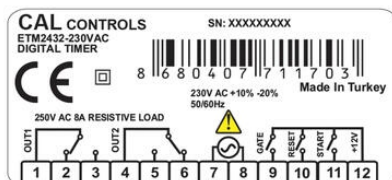

 Equipment is protected throughout by **DOUBLE INSULATION**