

DEFINOX - PRESSURE RELIEF VALVE

DE-TU038B14190

Pressure relief valve, Adjustable, 1½", EPDM, 0-3.5bar


- Safety valve with adjustable or fixed pressure 0-12 Bar
- Gaskets in FKM - EPDM
- 3.1 EN10204 Certificates by order
- Other connections, e.g. clamp, flanger mm.
- Standard with L-body in Aisi 316l / 1.4404



PRODUCT DESCRIPTION



TECHNICAL DATA

Certificate	3.1 EN10204
Connection type	Weld ends
Description	Adjustable valve
Design norm	SMS
Housing	L-body
Housing	EPDM
Inner diameter	35,6 mm
Material quality	1.4404
Operating pressure max	3,5 bar
Operating pressure min	0 bar
Outer diameter	38 mm
Pressure range max	3,5 bar
Pressure range min	0 bar
Surface finish	RA<0,8/1,2µm
Temperature range	0°C/+120°C
Weight	4,5 kg



Fast indstillet tryk

Hus: L form

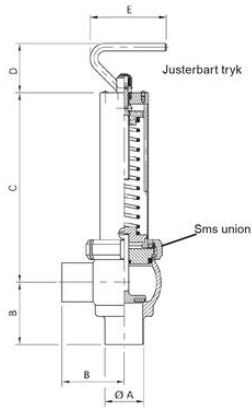

Fast indstillet tryk

Hus: L form

