

GNR SERIES 22.5MM RELAY

GNR10DCZ

DIN Rail SSR 22.5mm 240V ac 10A, 4-32V dc In, ZC

- Load current 10, 20 and 30A
- Operating voltage 24-280 VAC and 48-600 VAC
- Control voltage 4-32 VDC, 90-140 VAC and 180-280 VAC
- Broad range of power ratings



PRODUCT DESCRIPTION

These relays offer a broad range of power ratings which makes them suitable for diverse applications. Their high reliability and efficient design have made of them a market favorite for many years.

- Current ratings of 10, 20 and 30 amps
- Output voltage ratings: 24-280 and 48-600 VAC
- Direct Bond Copper (DBC) Substrate
- LED input status indicator
- UL 508 Endurance Rating for Enhanced Reliability
- UL/CSA/TUV Approved, CE Compliant
- Built-in overvoltage protection
- DIN Rail or Panel Mount
- Zero voltage or Instantaneous turn-on output

TECHNICAL DATA

OVERVIEW

Type of control	Zero voltage turn on
Additional features	Contact configuration
Output current	10 A
Activation	0 V
Control voltage	4-32V dc
Output voltage	24-280V ac

OUTPUT SPECIFICATION

Peak current	190 A
--------------	-------


Number of poles	1
I2t value	182 A ² s
Voltage drop over semiconductor at max	1,5 V
Output voltage	24-280V ac

INPUT SPECIFICATION

Turn-off voltage	1 V
Input current max	10 mA
Release time	10 ms
Response time	10 ms
Input current min	6 mA
Control voltage	4-32V dc

GENERAL SPECIFICATION

IP class	IP20
Depth	120,8 mm
Storage temperature min	-40 °C
Insulation voltage in/out	2500 V
Temperature operational max	80 °C
Weight	225 g
Width	22,5 mm
Storage temperature max	100 °C
Temperature operational min	-20 °C
LED indication	Input status indication
Approvals	CE, CSA, EMC, UL
Height	89,8 mm
Load voltage	AC

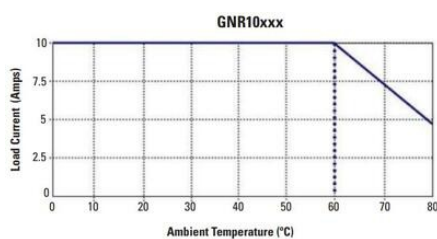

*GNR10A Series rated to 60°C max ambient

