



VARIOLINE LAMP WITH SOCKET LED 121/122 - OBSOLETE - NEW RANGE COMING SOON

Varioline

12204.0-30

OBSOLETE - LED 122 120 V AC, on/off switch, magnet fixing, USA/Canada socket

- OBSOLETE
- FOR LED LIGHT USE LED 025
- FOR SOCKETS USE SD 035



PRODUCT DESCRIPTION

LED 121/122 Range is now Obsolete - Stego has a New Range coming Mid 2024

TECHNICAL DATA

GENERAL DATA

| | |
|------------------------|----------------------------|
| Mounting | Magnetic mount |
| Nominal voltage | 120 V AC |
| Activation | Switch |
| Connection type | 3-pole plug with snap lock |
| Socket | USA/CA |
| Nominal socket current | 15 A |
| Light source | LED |
| Luminance | 1.080 Lm/1.730 Lm |
| Life span | 60,000h at +20°C |

DIMENSIONS

| | |
|--------|--------|
| Length | 700 mm |
| Width | 100 mm |
| Height | 44 mm |

ELECTRICAL SPECIFICATION

| | |
|-------------------|----------|
| Frequency | 50/60 Hz |
| Power consumption | 16 W |

SAFETY & APPROVALS


| | |
|-------------------|-------------|
| Protection class | I (earthed) |
| IP class | IP20 |
| Approvals | CE, RoHS |
| Approvals pending | UL |

MATERIALS - CONDITIONS

| | |
|-------------------------|-------------------|
| Material of body | Plastic |
| Colour | Translucent/White |
| Operational temperature | -30°C ... +40°C |
| Storage temperature | -40°C ... +85°C |
| Operating humidity | < 90% RH |
| Humidity storage | <90% RH |


ADDITIONAL DATA

| | |
|-------------|----------|
| Weight | 0,4 kg |
| Voltage max | 130 V ac |
| Voltage min | 110 V ac |

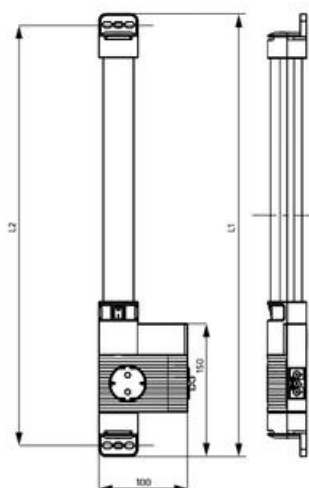

LED 121 (Size 1)
L1 = 500 mm
L2 = 475 mm

LED 122 (Size 2)
L1 = 700 mm
L2 = 675 mm

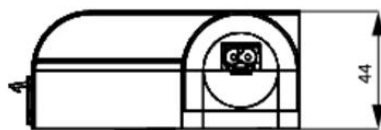

View of magnet fixing

