

PIL P44 ULTRASONIC SENSOR ANALOG AND TRANSISTOR OUTPUT

P44-160-M30-UI2PCM

Ultrasonic sensor, M30, 1,6m, 0-10V, 4-20mA, 2xPNP, connector





- Sensing distance 60-3500 mm
- Output 0-10 V + 4-20 mA + 2 PNP NO/NC
- M12 connector
- Teach button

PRODUCT DESCRIPTION

TECHNICAL DATA

Distance max	1600 mm
Distance min	80 mm
Electrical connection	M12 5-pole connector
Housing	M30
IP class	IP67
LED indication	Yes
Material of body	PBT
Operating frequency	1 Hz
Output	4-20mA, 0-10V, 2xPNP
Resolution	2 mm
Supply voltage dc max	30 V DC
Supply voltage dc min	15 V DC
Temperature operational max	70 °C
Temperature operational min	-15 °C

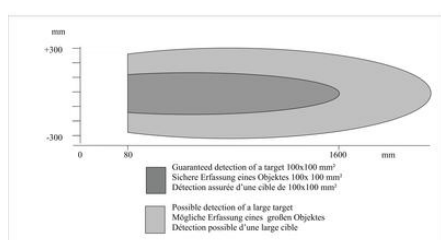

Wiring Pin Function

1 24 Vdc
 3 0 V GND
 2 SP2
 4 SP1
 5 0 - 10 V
 4 - 20mA

