

ORLACO DYNAMIC MAST CABLE

ORL0301731

Cable 15m 4P Molded Connector








- Soft surface with a small bend radius
- M16 4-pole cast contacts or M16 7-pole cast contacts
- -40 to +85 °C


PRODUCT DESCRIPTION

Suitable for use in moving applications, for example, for a gear camera mounted on an arm, a excavator boom or on a truck with a tipping platform. Works well in the mast on your truck.

TECHNICAL DATA

Cable diameter	9 mm
Cable length	15000 mm
IP class	IP67
Material	PUR
Temperature operational max	85 °C
Temperature operational min	-40 °C
Type	Analogue

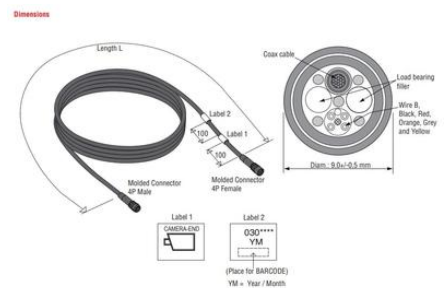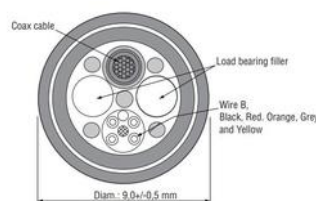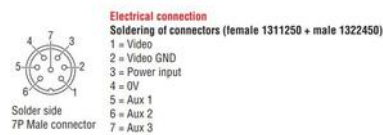

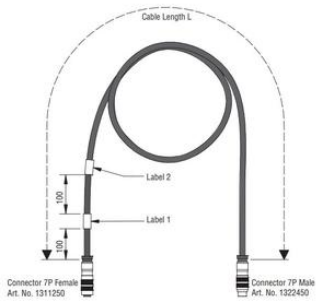

Units in mm

Label 2
030***0
YM

Label 1
Camera End