




PS-VA / PSL-VA

0133.900.002

- Stainless steel V2A | Braiding: fiber glass | Sheathing: silicone-rubber
- Stretch resistant
- Air and liquid-tight
- Widely resistant to solvents and chemicals

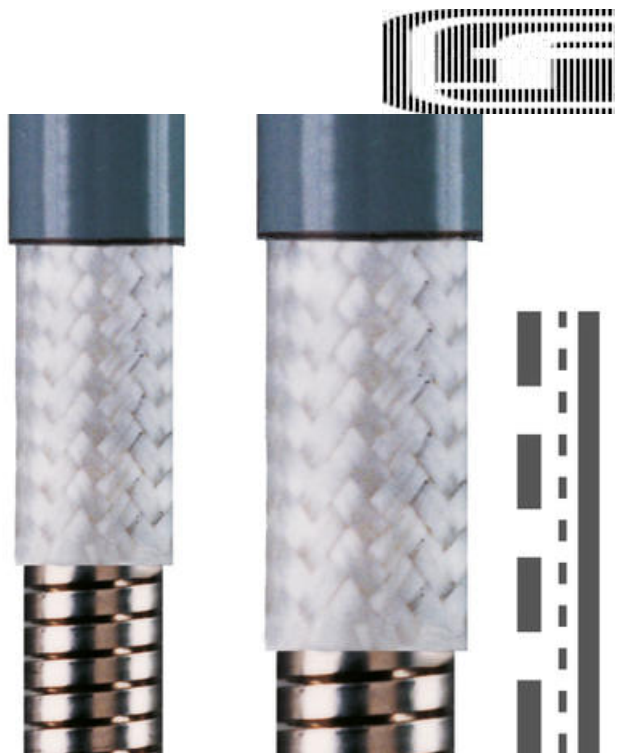

PRODUCT DESCRIPTION

TECHNICAL DATA

Bending radius $\pm 10\%$ dynamic	35
Bending radius -10% static	14
Hose dimension AD	4,4
Inner dimensions	2,5 mm
IP class	IP68
Outer dimensions	4,4 mm
Pack size	100
Weight / m	0,028