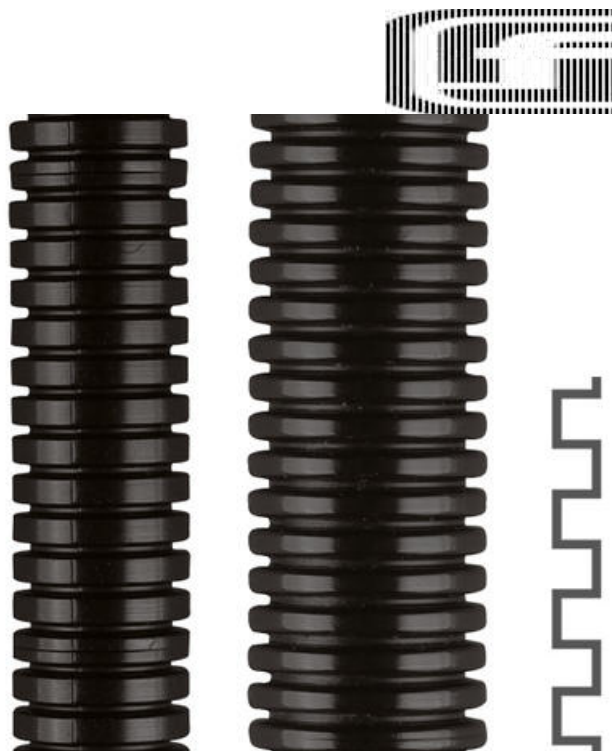



**ROHRFLEX® PA 6 PROTECTIVE  
CONDUIT**

0233.201.006

- Polyamide conduit for mechanical engineering
- Flexible material
- Halogen-free, flame retardant
- UV-resistant

**PRODUCT DESCRIPTION**

ROHRflex PA 6 is a highly versatile conduit for various industries. Both internally and externally corrugated. Oil resistant up to +80 °C, also resistant against acids and solvents. Applications include machine building, vehicles and electrical installations.

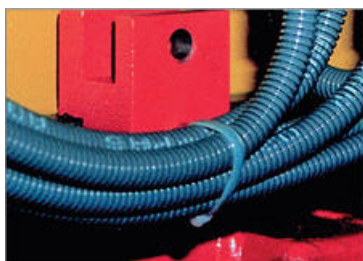

Supplied in full packages.

**TECHNICAL DATA**

<b>Approvals</b>	CE, RU, UL, VDE
<b>Bending radius ±10% dynamic</b>	35
<b>Bending radius -10% static</b>	13
<b>Colour</b>	Grey
<b>Fire rating</b>	UL94-VO
<b>Hose dimension AD</b>	10
<b>Inner dimensions</b>	6,5 mm
<b>Material</b>	Polyamide

<b>Outer dimensions</b>	10 mm
<b>Pack size</b>	50 m
<b>Temperature operational max</b>	115 °C
<b>Temperature operational min</b>	-40 °C
<b>Type</b>	ROHRFLEX PA6
<b>Weight / m</b>	0,018

