


OEM Automatic Ltd Address: Whiteacres, Whetstone Leicester, LE8 6ZG 0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

ROHRFLEX® PA 12 PROTECTIVE CONDUIT


0236.202.006 Plastic tube-PA12 AD 10,0 Black

- Very flexible
- · Resistant against continuous bending
- Halogen-free

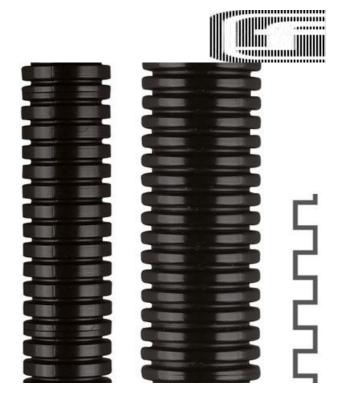

PRODUCT DESCRIPTION

ROHRflex PA 12 provides high flexibility needed in applications such as robot installations in- and outdoors. Both internally and externally corrugated. Good oil resistance.



Supplied in full packages, also available in orange and grey colors.

TECHNICAL DATA

Approvals	CE, VDE
Bending radius ±10% dynamic	35
Bending radius -10% static	13
Colour	Black
Fire rating	UL94-V2
Hose dimension AD	10
Inner dimensions	6,5 mm

Material	Polyamide
Outer dimensions	10 mm
Pack size	50 m
Temperature operational max	100 °C
Temperature operational min	-50 °C
Туре	ROHRFLEX -PA12
Weight / m	0,2

