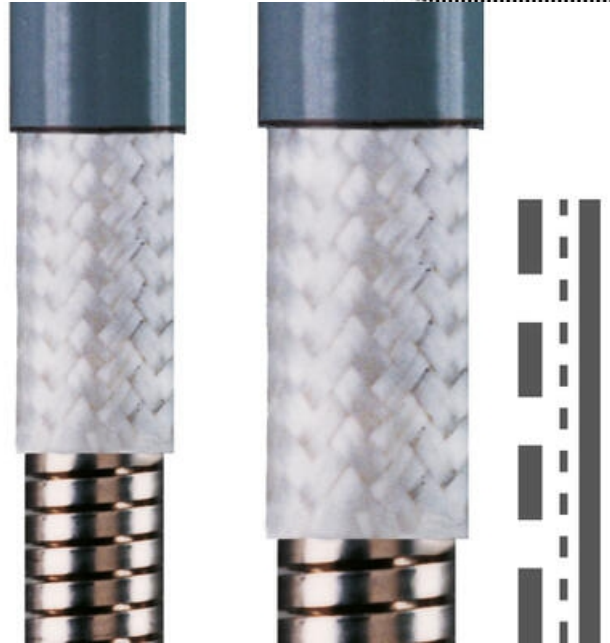


**PS-VA / PSL-VA**

0133.900.002

- Stainless steel V2A | Braiding: fiber glass | Sheathing: silicone-rubber
- Stretch resistant
- Air and liquid-tight
- Widely resistant to solvents and chemicals

**PRODUCT DESCRIPTION****TECHNICAL DATA**

<b>Bending radius <math>\pm 10\%</math> dynamic</b>	35
<b>Bending radius -10% static</b>	14
<b>Hose dimension AD</b>	4,4
<b>Inner dimensions</b>	2,5 mm
<b>IP class</b>	IP68
<b>Outer dimensions</b>	4,4 mm
<b>Pack size</b>	100
<b>Weight / m</b>	0,028