


## EMC RAPID

Progress® EMC Rapid

1081.12.060

Gland EMC Rapid, contact disc, M12, ø4.5...6mm

- Quick assembly
- Contact disc shield connection
- Low contact resistance
- -40°C...+100°C
- IP 68 up to 10 bar, IP69K

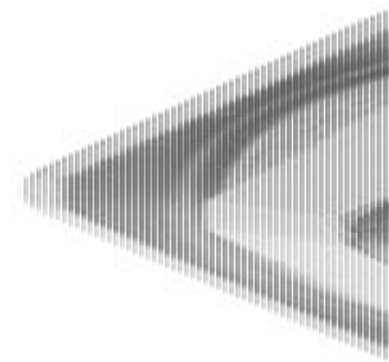

### PRODUCT DESCRIPTION

### TECHNICAL DATA

#### GENERAL DATA

Thread Size (G)	M12
Insert Type	One-Piece
Cable diameter min	4,5 mm
Cable diameter max	6 mm
IP class	IP 68 (up to 10 bar), IP 69 further protection

#### DIMENSIONS

Thread pitch	1,5
Thread length	5 mm
Height (H)	20 mm
Spanner width (AF)	15 mm

#### MATERIALS

Material	Nickel-plated brass
Materials O-ring	NBR
Material of seals	TPE

Contact sleeve material	Nickel-plated brass
Contact disc material	Stainless steel A2
Temperature range	-40°C ... +100°C

## APPROVALS

Approvals	SEV, CE, cRUus, DNV, EAC, VDE
Strain relief	Version A acc. to EN 62444

## ADDITIONAL DATA

Pack size	50
Country of origin	CH
Tariff code	74199949
Weight	14,42 g

