


SYNTHETIC GFK EX E II

Progress® GFK Ex

EX1540.17.060

Gland Ex synthetic, Ex e II, black, M16, ø4.5...6mm

- Ex e II
- -20°C...+85°C
- IECEx approved
- IP66/IP68 up to 10 bar

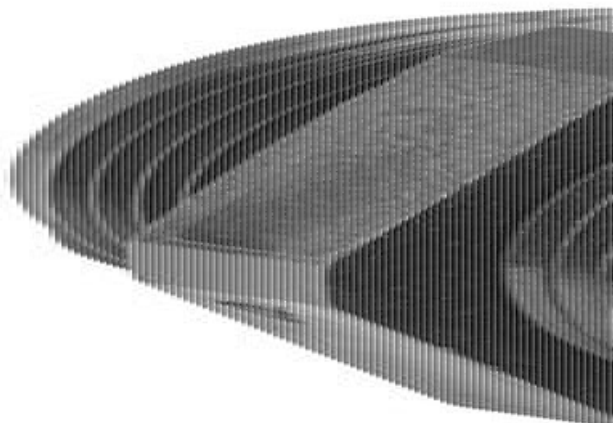

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Thread Size (G)	M16
Insert Type	One-Piece
Cable diameter min	4,5 mm
Cable diameter max	6 mm
IP class	IP 66 / IP 68
Colour	Black RAL 9005

DIMENSIONS

Thread pitch	1,5
Thread length	12 mm
Height (H)	26 mm
Spanner width (AF)	21 mm

MATERIALS

Material	Fiberglass reinforced polyamide
Material of seals	NBR, TPE

Temperature range	-20°C ... +85°C
--------------------------	-----------------

APPROVALS

Approvals	CE, DNV, EX, IECEX
------------------	--------------------

Test standard	IEC EN 60079-0 / IEC EN 60079-7 / IEC EN 60079-31
----------------------	---

Ex zones	Gas 1 and 2 / dust 21 and 22
-----------------	------------------------------

Ex-Zone gas	II 2G Ex eb IIC Gb
--------------------	--------------------

EX-zone dust	II 2D Ex tb IIIC Db
---------------------	---------------------

IECEX certificate	IECEX SEV 15.0019X
--------------------------	--------------------

Certificate	SEV 15 ATEX 0152X
--------------------	-------------------

ADDITIONAL DATA

Pack size	50
------------------	----

Country of origin	CH
--------------------------	----

Tariff code	39269000
--------------------	----------

Weight	11,88 g
---------------	---------