


## FUSE TERMINALS - FTRK/FSIK

FTRK, FSIK

3239.4

FSIK 4/2A/MT BK

- For glass tube fuses 5x20
- For automotive fuses
- Material polyamide 6.6
- Temperature resistance -40°C...+120°C

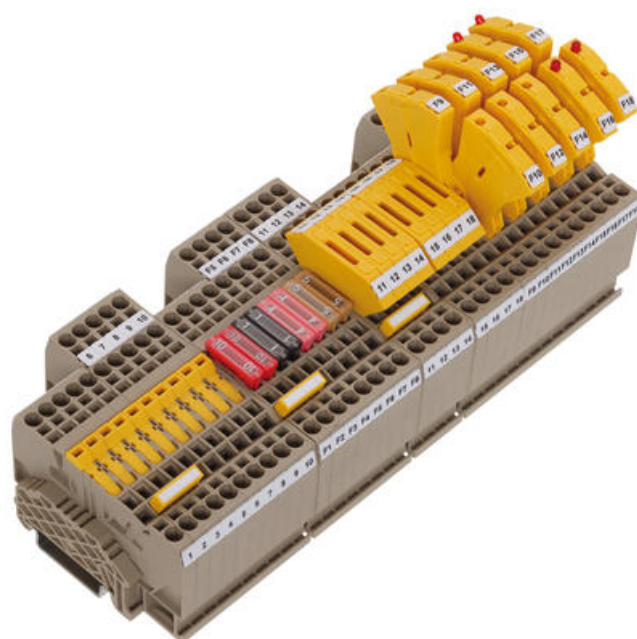

### PRODUCT DESCRIPTION

### TECHNICAL DATA

#### GENERAL DATA

Rated wire cross section	4 mm <sup>2</sup>
Colour	Black
Rated current	18 A
Rated voltage	400 V
Rated voltage IEC	400 V
Rated current IEC	18 A
Fuse size	Blade Disconnect
Mounting	TS 35
Rated impulse voltage	6 kV
Overvoltage category	III
Contamination degree	3
Approvals	Pending, CSA, cCSAus, KEMA KUR

#### DIMENSIONS

Length	67,5 mm
--------	---------

Width	6,1 mm
Height TS 35/7.5	47 mm
Height	46 mm

## CONNECTION DATA

Connections	2
Number of levels	1
Plug gauge acc. EN 60 947-1	A3
Cross connect channels	1
Cross section single wire from	0,2 mm <sup>2</sup>
Cross section single wire to	4 mm <sup>2</sup>
Cross section stranded wire from	0,2 mm <sup>2</sup>
Cross section stranded wire to	2,5 mm <sup>2</sup>
Cross section stranded with ferrule from	0,2 mm <sup>2</sup>
Cross section stranded with ferrule to	2,5 mm <sup>2</sup>
Rated wire cross section from (AWG)	24
Rated wire cross section to (AWG)	10
Stripping length	12 mm

## MATERIALS

Insulation material	Polyamide 6.6
Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C

## APPROVALS

Rated voltage UL	300
Rated voltage UL	300 V
Rated current UL	15 A
UL test standard	UL 1059
Rated voltage CSA	300 V
Rated current CSA	15 A
CSA test standard	C22.2 No 158
Rated voltage CSAus	300 V
Rated current CSAus	15 A
CSAus test standard	UL 1059

**KEMA KEUR test standard**

EN 60947-7-3:2009

## **ADDITIONAL DATA**

**Tariff code**

85369010

**Country of origin**

BG

**Weight**

13,72 g

**Pack size**

50