

C12 INTERFACE RELAY

2-pole 5 A - IRC

C12A2124A

Relay 8 Pin 2 Pole 24V ac

- Robust flat pins
- Both mechanical and LED indication
- Colour-coded test button
- Integrated safety components



PRODUCT DESCRIPTION

TECHNICAL DATA

INPUT DATA

Working Un	0,8-1,10
Nominal power ac	1,1 VA
Coil voltage ac	24 V AC
Voltage min	0,6 V
Overvoltage UNX max	1,1
Response time	10 ms

OUTPUT DATA

Number of contacts	2
Contact material	AgNi + 0,2 μ Au
Breaking Voltage	250 V
Breaking capacity current	5 A
Recommended max load	5 A/250 V AC 1; 0,5A/110 V DC-1
Recommended min load	10 mA/10 V
Mechanical life expectancy	AC: 10Mill/. DC: 20 Mill
Surge current (20 ms)	15 A
Bounce time	1
Release time	5 ms

Release time + contact debounce 8 ms

GENERAL DATA


IP class IP40

Isolation contact/contact 3000 V

Isolation contact/coil 5000 V


Frequency 50 Hz

Weight 21 g

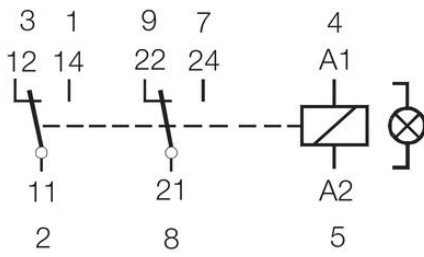


C12-A21

5A 250V AC-1
5A 30V DC-1



A2 — A1

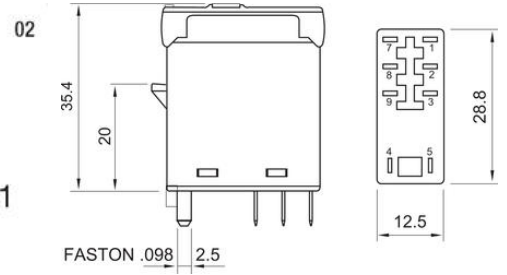

CE EAC

Made in India

