

P30U TEMPERATURE AND STANDARD SIGNAL TRANSDUCER

Universal Transducer with Ethernet

P30U101100E0
PROG. TRANSDUCER 24V

- Universal input (programmable)
- RS485 slave
- 1 or 2 (option) alarm output
- Wide voltage, AC/DC control



PRODUCT DESCRIPTION



Please refer to the [data sheet](#) for ordering keys and [contact us](#) for more information.

Part numbers have changed from ending with E0 to M0, please be advised any part numbers below that end in E0 will say M0 in the datasheet. The product is the same.

Code	Description
P30U 101100M0	Transducer of temperature and standard signals P30U analog output 0/4...20mA; 2 relays, supply 85-253Vac / 85-300Vdc; documentation and descriptions in Polish and English, test certificate
P30U 121100M0	Transducer of temperature and standard signals P30U analog output 0/4...20mA; 2 relays, Ethernet and archive file system memory; supply 85-253Vac / 85-300Vdc; documentation and descriptions in Polish and English, test certificate

ACCESSORIES:

SD CARD	
Capacity	Ordering code
1 GB	20-199-00-00023
2 GB	20-199-00-00025

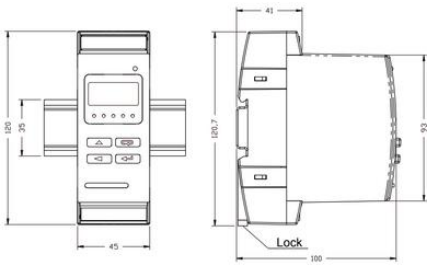

P30U-XX1XXXXX



P30U-XX2XXXXX

