

HONSBERG - GK SERIES FLOW INDICATOR

Flow display with float

GK-010GTW0100

- Flow from 0.2 to 10 Nm²/h³/h air and 10-640 l/h water
- For pressure up to 15 bar
- With min. and max. indication



PRODUCT DESCRIPTION

Model GK is a variable area flow meter with a scale that is easy to read. It has been developed to measure liquids and gases/air in various forms.

SPECIAL VERSIONS

- Special scales
- Reed switches

TECHNICAL DATA



Accuracy	+/- 3% of the final value
Connection type	Internal thread, G 3/8 "
Flow range max	1,66 l/min
Flow range min	0,16 l/min
Function	Flow indicator, float body
Material of body	Polysulfone
Material of connection	Die cast metal
Material of seals	Viton
Material suspension body	Polypropylene
Pressure drop	Max 20 mbar
Pressure range max	15 bar
Temperature of media to	60 °C

Type of flow component



Flowmeter

Weight

0,2 kg

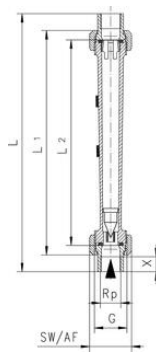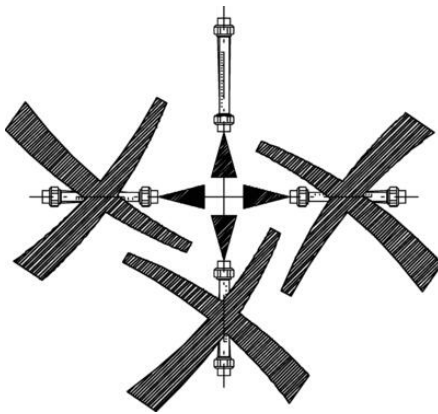

Rp	L mm	L1 mm	L2 mm	G	SW mm	X mm	Weight kg
3/8	207	180	165	3/4	32	12	0,18
1/2	215	185	170	1	41	13	0,30
3/4	230	201	185	11/4	50	16	0,50
1	250	219	200	11/2	55	19	0,65

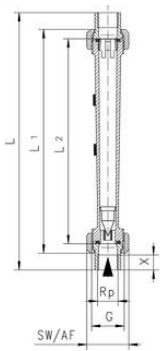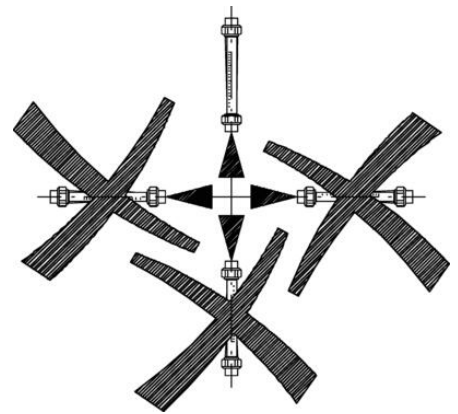

Rp	L mm	L1 mm	L2 mm	G	SW mm	X mm	Weight kg
3/8	207	180	165	3/4	32	12	0,18
1/2	215	185	170	1	41	13	0,30
3/4	230	201	185	11/4	50	16	0,50
1	250	219	200	11/2	55	19	0,65