

## DATALOGIC - PROTECTIVE HOUSING SG-IP69K

SG-IP69K-150  
95ASE1290 IP69K Protection Tubes for 150mm Light  
Curtains

- IP69K protective housing
- Available for heights 150–1800 mm
- Installation by user



### PRODUCT DESCRIPTION

Datalogic SG-IP69K protective housing is a PMMA acrylic tube to protect and seal light curtains of SG2-B, SG2-E, SG4-B and SG BODY COMPACT series. Thanks to SG-IP69K accessory the IP protection of the light curtain is increased from IP65 to IP67, IP68 and IP69K.

The Gore-Tex membrane on the caps prevents water or dirt entering as well as internal condensation. The connection cable for the light curtain is protected and kept in its place by a M16 metric chock that prevents the entry of water or dirt.


The SG-IP69K accessory is particularly suitable where high levels of humidity and temperature are present and machines or equipments are frequently washed with hot water (up to 80°C) at high pressure (up to 100 bars) and/or cleaned with detergents.


SG-IP69K is particularly suitable for FOOD industry applications:

- beverage production
- meat slaughter
- sausage production
- milk/cheese industry



### TECHNICAL DATA

<b>IP class</b>	IP67, IP68, IP69K
<b>Material protection</b>	PMMA

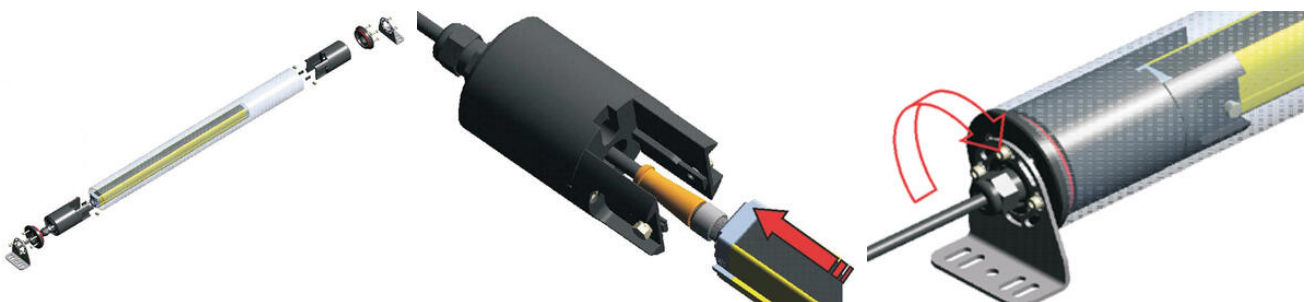



MODEL	L (mm)
SS-PPM 100	375.0
SS-PPM 300	530.0
SS-PPM 400	475.0
SS-PPM 400	400.0
SS-PPM 700	875.0
SS-PPM 800	1100.0
SS-PPM 1000	1275.0
SS-PPM 1200	1420.0
SS-PPM 1500	1575.0
SS-PPM 1500	1720.0
SS-PPM 1500	1870.0
SS-PPM 1800	2020.0
SS-PPM 2-080	61.0
SS-PPM 3-080	111.0
SS-PPM 4-070	213.0
SS-PPM 4-100	313.0

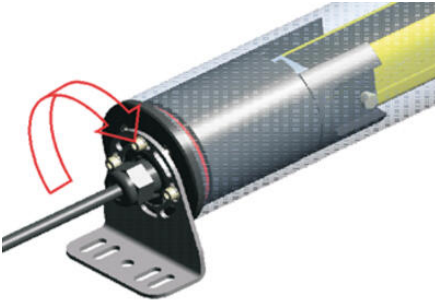

MODEL	L (mm)
SS-PPM 100	375.0
SS-PPM 300	530.0
SS-PPM 400	475.0
SS-PPM 400	400.0
SS-PPM 700	875.0
SS-PPM 800	1100.0
SS-PPM 1000	1275.0
SS-PPM 1200	1420.0
SS-PPM 1500	1575.0
SS-PPM 1500	1720.0
SS-PPM 1500	1870.0
SS-PPM 1800	2020.0
SS-PPM 2-080	61.0
SS-PPM 3-080	111.0
SS-PPM 4-070	213.0
SS-PPM 4-100	313.0