

NOVA22 SERIES AC OUTPUT

DR2260D20U

DIN Rail SSR 22.5mm 600V ac 20A, 4-32V dc In, ZC



Crydom

- Load current 20, 30 and 35 A
- Operating voltage 48-600 VAC
- Control voltage 4-32 VDC and 90-280 VAC/VDC
- Relay or contactor configurations
- Load Monitoring Module available for contactor configuration



PRODUCT DESCRIPTION

NOVA22 solid state relays were developed combining technology and innovation to offer high performing solid state relays in a 22.5mm industrial package. The advanced design and technology used in NOVA22 products provide greater power density than any other 22.5 mm wide SSR in the market: 35 A in DIN rail mount and 95 A in Panel Mount package.

Wide and innovative range of connection

The unique range of terminal options and configurations makes NOVA22 the most versatile solution.

- Relay or contactor terminal configurations
- Screw or spring cage plug-in input terminals
- Standard or elevator screws, allowing the use of ring terminals

Diverse range of applications

NOVA22 solid State Relays can be used in a wide range of ac and dc applications. Ideal for heating applications, NOVA22s are also suitable for motion, power and lighting applications; especially for demanding applications that require higher levels of reliability including:

- Industrial OEMs: Plastic machinery, packaging and material handling equipment, industrial ovens, pumps
- Food & Beverage: Baking ovens, refrigeration, food processing equipment
- Building Equipment: HVAC&R, lighting, access control
- Energy & Infrastructure: Renewable Energy, water and waste water treatments
- Transportation: Railway vehicles, agricultural machinery

TECHNICAL DATA

OVERVIEW

Type of control	Zero voltage turn on
Connection	Screw connection
Output current	20 A

Control voltage	4-32V dc
Output voltage	48-600V ac

OUTPUT SPECIFICATION

Leakage current at V max, T=25°C max	1 mA
Peak current	286 A
Load current min	100 mA
Number of poles	1
I²t value	409 A ² s
Voltage drop over semiconductor at max	1,35 V
Peak voltage	1200 V
Output voltage	48-600V ac


INPUT SPECIFICATION

Turn-off voltage	1 V
Input current max	15 mA
Control voltage dc min	4 V
Input current min	10 mA
Control voltage	4-32V dc
Control voltage dc max	32 V

GENERAL SPECIFICATION

IP class	IP20
Storage temperature min	-40 °C
Insulation voltage in/out	4000 V
Temperature operational max	80 °C
Weight	298 g
Width	22,5 mm
Storage temperature max	100 °C
Temperature operational min	-40 °C
LED indication	Input status indication
Approvals	CE, CSA, EMC, UL
Height	93,2 mm
Load voltage	AC

DR2260x20x

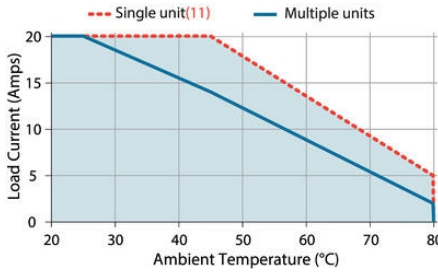

4-32 VDC Input

